

Dane aktualne na dzień: 09-05-2024 12:50


Link do produktu: <https://dronexpert.eu/neutral-video-transmitter-vtx-1g3te-9ch-1213ghz-p-15992.html>



Neutral Video Transmitter VTX-1G3TE 9ch 1.2/1.3GHz

Cena brutto	299,00 zł
Cena netto	243,09 zł
Dostępność	Wysyłka 24 godziny/Odbiór osobisty
Kod producenta	MTVTX1G3TE

Opis produktu

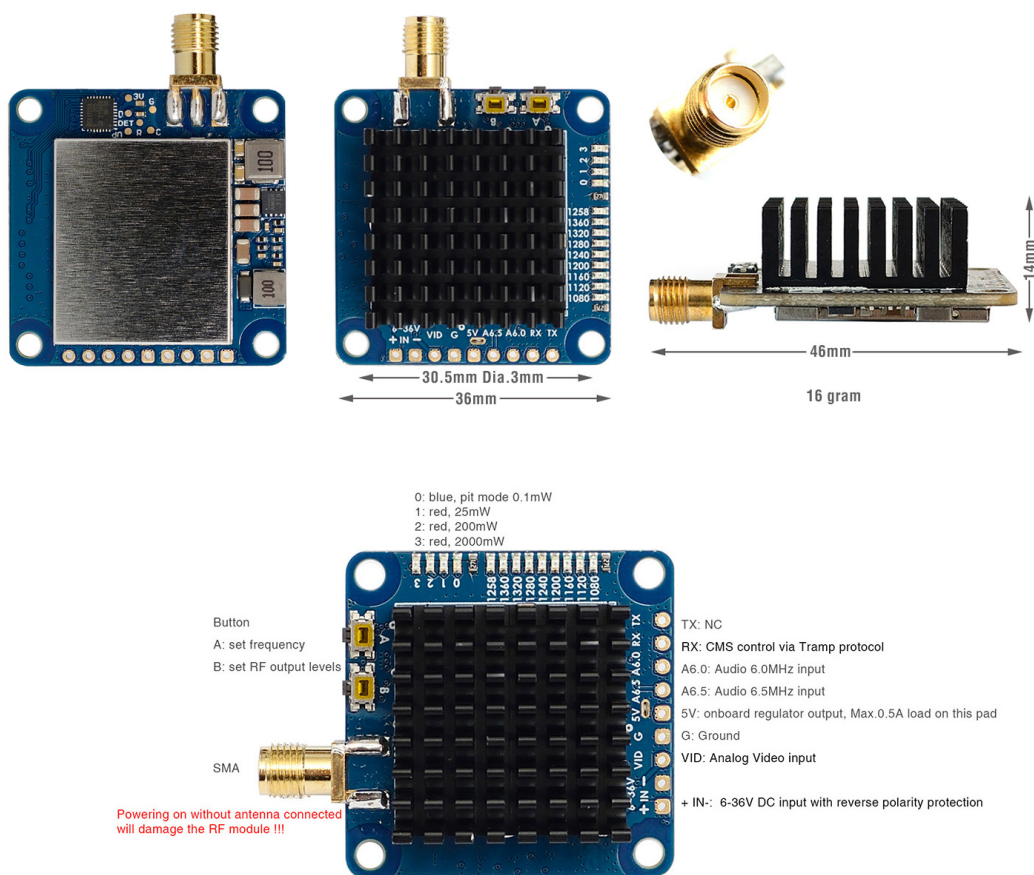

Specifications

- 9CH_INTL version (1080,1120,1160,1200,1240,1280,1320,1360,1258MHz),
- RF power output: 0.1mw(0, pit mode), 25mw(1), 200mw(2), 2000mw(3)
- CMS control via Tramp protocol variant for 1.3G
- Button control and LED indicators
- 6-36V DC IN (2-8S LiPo)
- Power Consumption: 0.04A(0.1mw), 0.1A(25mw), 0.2A(200mw), 0.8A(2000mw) @12V IN
- Video format: NTSC or PAL
- Audio Subcarrier: 6.5 MHz & 6.0MHz
- RF Connector: SMA
- Weight: 16g (w/o antenna)
- Size: 46*36*14mm

Packing

- 1x VTX-1G3TE
- 1x Dipole antenna_SMA

Settings

- Press button-A to select RF output levels, 0 (blue LED)= 0.1mw pitmode, 1=25mw, 2=200mw, 3=2000mw
- Press button-B to select the frequency.

CMS control

Connect "RX" to any spare UART-TX of flight controller, enable "VTX(Tramp) protocol" on corresponding UART.
Copy and paste following command into CLI of BF4.1 or later release

```
vtxtable bands 2
vtxtable channels 8
vtxtable band 1 1G3_AA 1080 1120 1160 1200 1240 1280 1320 1360
vtxtable band 2 1G3_B 1080 1120 1160 1200 1258 1280 1320 1360
vtxtable powerlevels 3
vtxtable powervalue 25 200 2000
vtxtable powerlabels 25 200 800
```

When CMS control is enabled, button control will be overridden.
INAV 6.1.1 or older versions don't support 2000mW setup via Tramp protocol

ROBSTAR Oddział Dronexpert.eu & UAVO.TV

Authorised Reseller DJI

ul. Ożarowska 61, Warszawa

tel. 501832306, 507273177, 501750577
