

Link do produktu: <https://dronexpert.eu/silnik-hglrc-aeolus-12025-5600kv-3-4s-p-14702.html>



Silnik HGLRC Aeolus 1202.5 5600KV 3-4S

Cena brutto	64,68 zł
Cena netto	52,58 zł
Dostępność	Aktualnie niedostępny
Czas wysyłki	24 godziny
Producent	HGLRC

Opis produktu

Silnik HGLRC Aeolus 1202.5 5600KV 3-4S




Specyfikacja:

- KV5600
- Liczba ramion stojana: 9N
- Liczba biegunów wirnika: 12P
- Rezystancja silnika: 320 mΩ
- Maksymalny prąd ciągły: 6,2 A
- Moc maksymalna: 88,8 W
- Liczba ogniw (Lipo): 11,1-16,8 V (3-4S)
- ESC:> 13A
- Zalecana rama (cale): 2-3 cale
- Wymiary silnika: Φ15,94 mm x 9 mm
- Waga: 4,6 g



Motors : HGL 1202.5-5600KV

Technical Datas	
KV	5600
Configu-ration	9N12P
Stator Diamter	12mm
Stator Length	2.5mm
Shaft Diameter	2mm
Motor Dimension(Dia.*Len)	Φ 15.94*9mm
Weight(g)	4(3cm wire)
Idle current(10)@10V(A)	0.55
No.of Cells(Lipo)	3~4S
Max Continuous Power(W)3S	70
Internal Resistance	320mΩ
Max Current(3S)	6.2A
Max.Efficiency Current	(0.8-2A)>83%

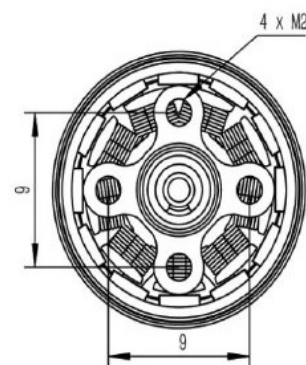

Prop (inch)	Voltages (V)	Throttle (%)	Load Current (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 3's)
GF 65R	11.1	50%	0.6	50	6.7	7.508	50°C
		100%	3.5	152	38.9	3.912	
	14.8	50%	1.25	84	18.5	4.541	57°C
		100%	4.9	220	72.5	3.034	
HQ T65R	11.1	50%	1	63	11.1	5.676	54°C
		100%	4.5	171	50.0	3.423	
	14.8	50%	1.7	88	25.2	3.498	62°C
		100%	6	224	88.8	2.523	
HQT3x2R	7.4	50%	1.1	60	8.1	7.371	53°C
		100%	4.1	130	30.3	4.285	
	11.1	50%	1.7	91	18.9	4.822	63°C
		100%	6.2	200	68.8	2.906	
GF3108	7.4	50%	1.1	58	8.1	7.125	53°C
		100%	4	128	29.6	4.324	
	11.1	50%	1.6	87	17.8	4.899	63°C
		100%	6.1	194	67.7	2.865	

ROBSTAR Oddział Dronexpert.eu & UAVO.TV

Authorised Reseller DJI

ul. Ożarowska 61, Warszawa

tel. 501832306, 507273177, 501750577
