Dane aktualne na dzień: 24-04-2024 15:16

Link do produktu: https://dronexpert.eu/silnik-iflight-xing-x1404-5500kv-toothpick-ultralight-build-black-protek-25-p-14407.html

Silnik Iflight XING X1404 5500KV Toothpick Ultralight Build (black) Protek 25

Cena brutto	**69,56 zł**
Cena netto	**56,54 zł**
Dostępność	**Aktualnie niedostępny**
Kod producenta	**X009071**
Producent	**IFLIGHT**

Opis produktu

The new MOTOR XING X1404 designed for ultralight toothpick build, that micro drone change FPV in nowadays. Super light 3" builds like these just got much nicer since we got SucceX whoop style all in in one (AIO) with iflight new toothpick style frame you can build the ultralight microdrone.

SPECIFICATIONS

-Voltage: 2S-4S

-KV Option: 3000KV/3800KV/4600KV

-Configuration: 9N12P

-Stator Diameter: 14mm

-Stator Length: 4mm

-Shaft Diameter:2mm

-Motor Dimensions(Dia.*Len): Φ18.3×12.5mm

-No.of Cells(Lipo): 2-4S

-Max Continuous current(A): 11.8A

-Max Continuous Power(W): 174.6W

-Internal resistance: 0.28Ω

-Weight: 8.5g(without cable)

-Mounting pattern: 9*9mm

-Bearing: 5*2*2.5mm

Package included:

-1 x 1404 Motor (Option:3000KV/3800kV/4600KV)

-4x M2x5 mounting screws

iFlight XING 1404 4600KV

Technical Datas	
KV	4600
Configu-ration	9N12P
Stator Diamter	14mm
Stator Length	4mm
Shaft Diameter	2mm
Motor Dimension(Dia.*Len)	19. 2*18. 5
Weight(g)	9.3
Idle current(10)@5.5V(A)	0. 55
No.of Cells(Lipo)	3-4S
Max Continuous Power(W)60S	193.3
Internal Resistance	175mΩ
Max Current(60S)	12.08A

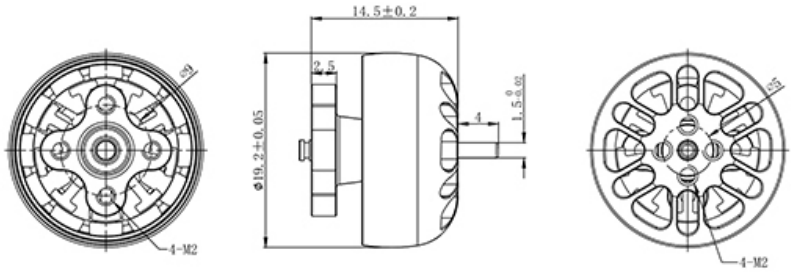

Prop (inch)	Voltages (V)	Throttle (%)	Load Currency (A)	Pull(g)	Power(W)	Efficiency(g/W)	Temperature(in full throttle load 1min)
3*3*3	16	50%	2.88	189	46.1	4.102	43℃
		60%	3.39	219	54.2	4.038	
		70%	5.29	293	84.6	3.462	
		80%	7.46	323	119.4	2.706	
		90%	9.59	355	153.4	2.314	
		100%	12.08	389	193.3	2.013	
■Airplane			☐Helicopter			■Vtol	